

Startup Tag^Routine property for UnknownUser

Published on InterSystems Developer Community (<https://community.intersystems.com>)


Pregunta

[Nikita Savchenko](#) · 2 nov, 2016

Startup Tag^Routine property for UnknownUser

Hello community!


I am trying to set up Startup Tag^Routine field for the UnknownUser as follows:

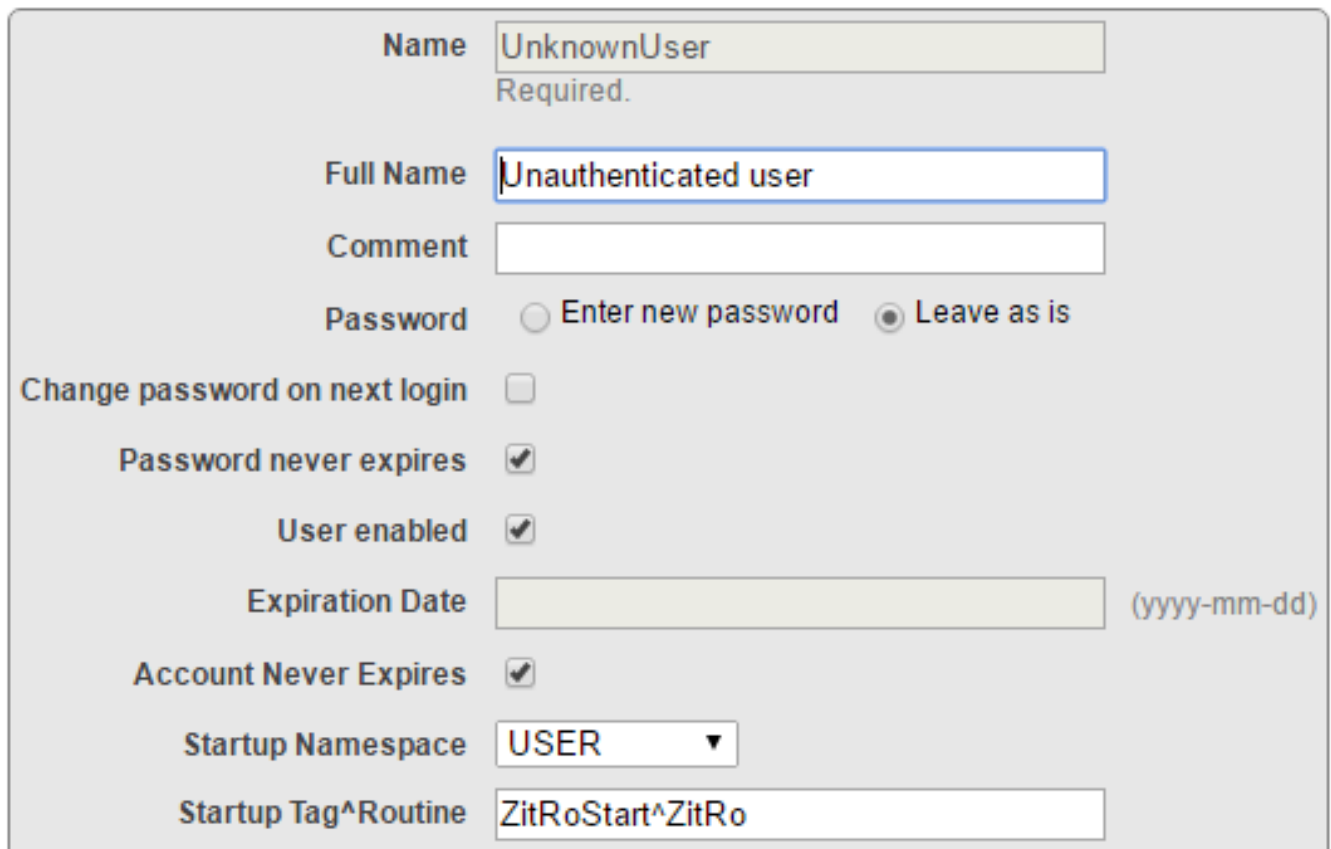

The screenshot shows the configuration form for the 'UnknownUser' user. The fields and their values are as follows:

- Name:** UnknownUser (Required.)
- Full Name:** Unauthenticated user
- Comment:** (Empty)
- Password:** ☐ Enter new password ☒ Leave as is
- Change password on next login:** ☐
- Password never expires:** ☒
- User enabled:** ☒
- Expiration Date:** (Empty) (yyyy-mm-dd)
- Account Never Expires:** ☒
- Startup Namespace:** USER (Dropdown menu)
- Startup Tag^Routine:** ZitRoStart^ZitRo

And my simple routine is the next:

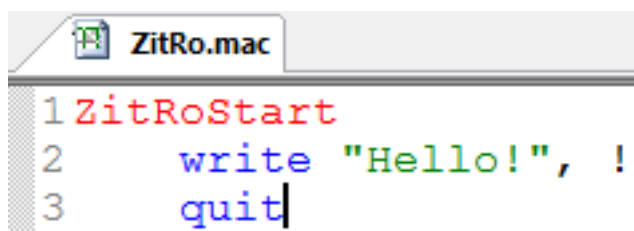


```
1 ZitRoStart
2   write "Hello!", !
3   quit
```

Calling `do ZitRoStart^ZitRo` in the terminal prints "Hello", but when opening Caché Terminal it results with the next:

Startup Tag^Routine property for UnknownUser

Published on InterSystems Developer Community (<https://community.intersystems.com>)

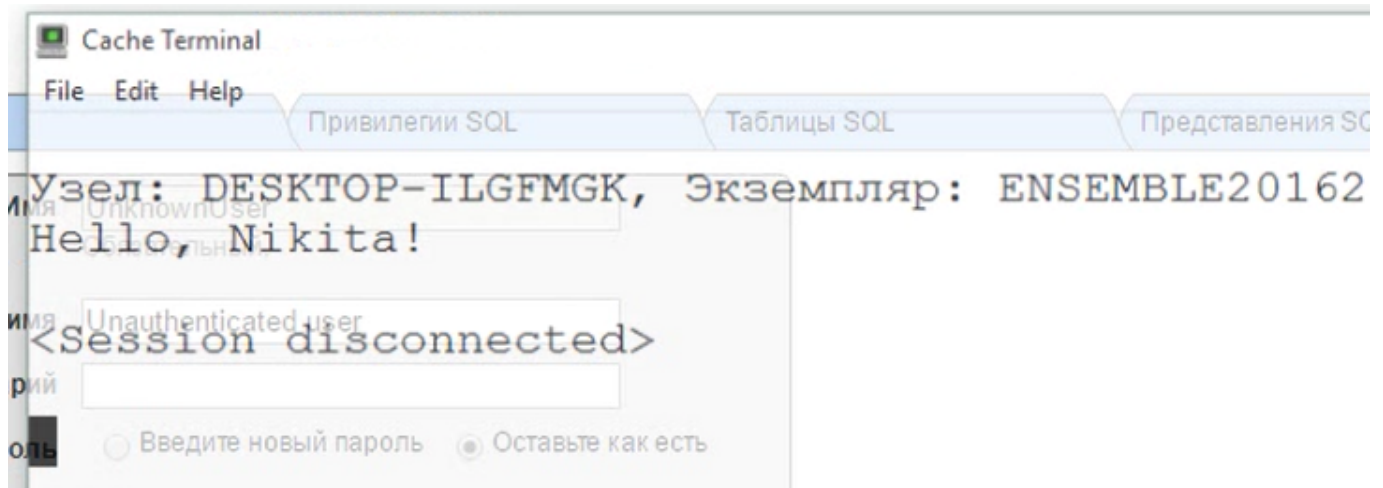

And the terminal closes.

// Cache for Windows (x86-64) 2016.2 (Build 636U) Wed Apr 13 2016 20:58:35 EDT

What am I doing wrong in setup?

Thank you very much!

[#Caché](#) [#Terminal](#) [#Control de acceso](#) [#Administración del sistema](#)

URL de fuente: <https://es.community.intersystems.com/post/startup-tagroutine-property-unknownuser>